

Umbauanleitung
Conversion Instructions
Instructions de modification

CLAAS

Lüfter mit Drehzahlreduzierung
Reduced Speed Fan
Ventilateur avec réduction du
régime de rotation

TARGO K-SERIE


CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

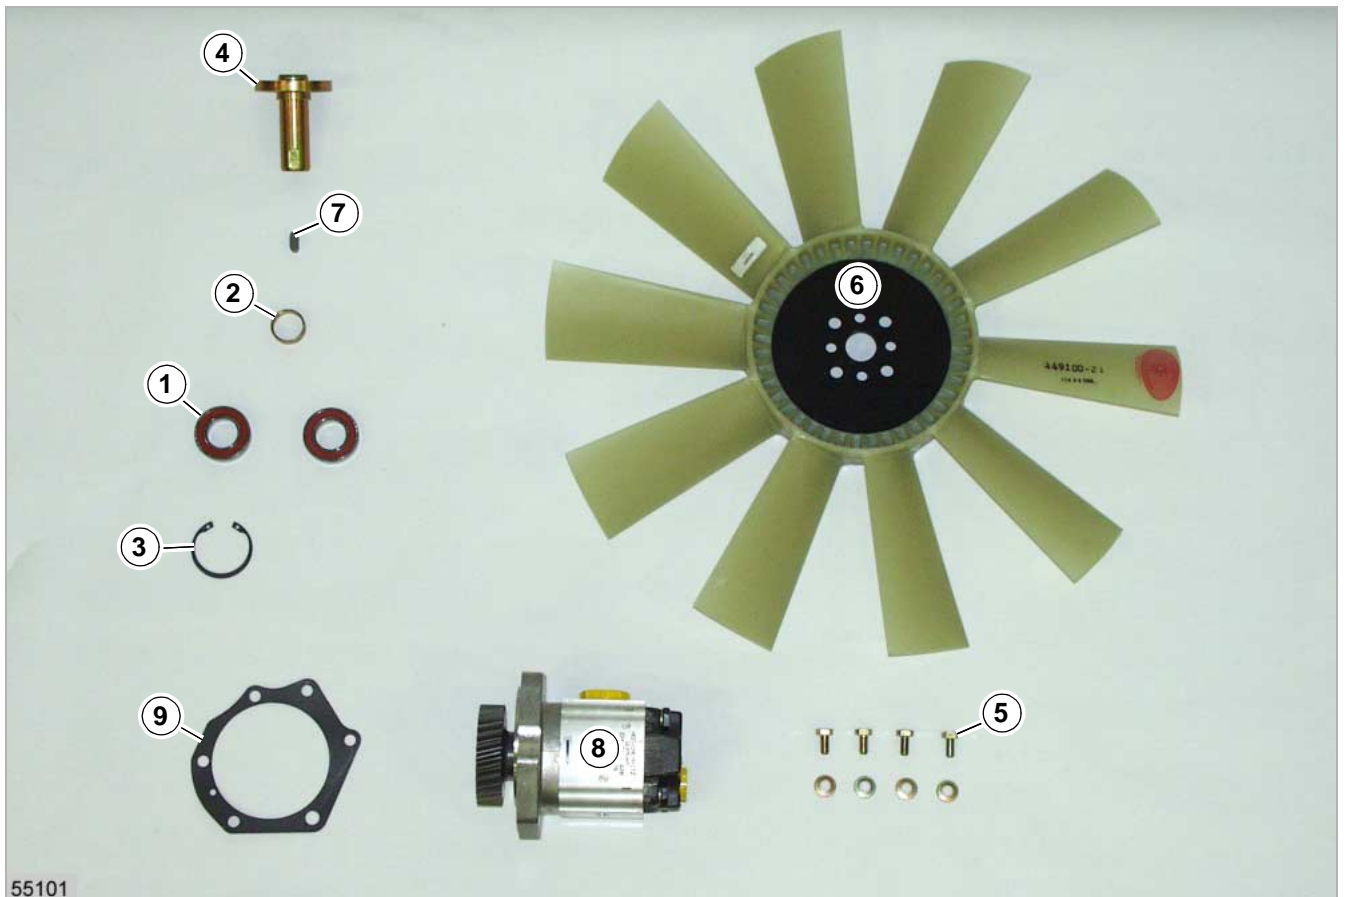

1

4 Lieferumfang

LIEFERUMFANG

Umrüstsatz 349 332.0

Pos.-Nr.	Ersatzteil-Nr.	Bezeichnung	Abmessungen	DIN	Anzahl
1	237 713.0	Rillenkugellager	2 RS	6005	2
2	317 410.0	Distanzring			1
3	235 181.0	Sicherungsring	47 x 1,75	472	1
4	349 330.1	Lüfternabe			1
5	237 439.0	Sechskantschraube	M 8 x 16	933-8.8	4
	239 387.0	Contact-Scheibe	A 8		4
6	349 334.0	Lüfter	21 inch		1
7	317 277.0	Passfeder	8 x 7 x 18		1
8	349 333.0	Hydraulikpumpe	17 ccm		1
9	317 744.0	Dichtung			1

(Abb. 1)


Keilriemenschutz wieder anschrauben.

Kühlergrill wieder anbauen.

Motorhaube wieder schließen.

Probelauf vorbereiten und durchführen

1. Alle Schrauben korrekt anschrauben!
2. Das verwendete Werkzeug zurücklegen!
3. Alle Sicherheitseinrichtungen funktionsfähig anbauen!
4. Elektrische Anschlüsse überprüfen!
5. Einstellungen an der Maschine prüfen!
6. Alle erforderlichen Schmierstellen abschmieren!
7. Alle Ölstände kontrollieren!
8. Probelauf durchführen!

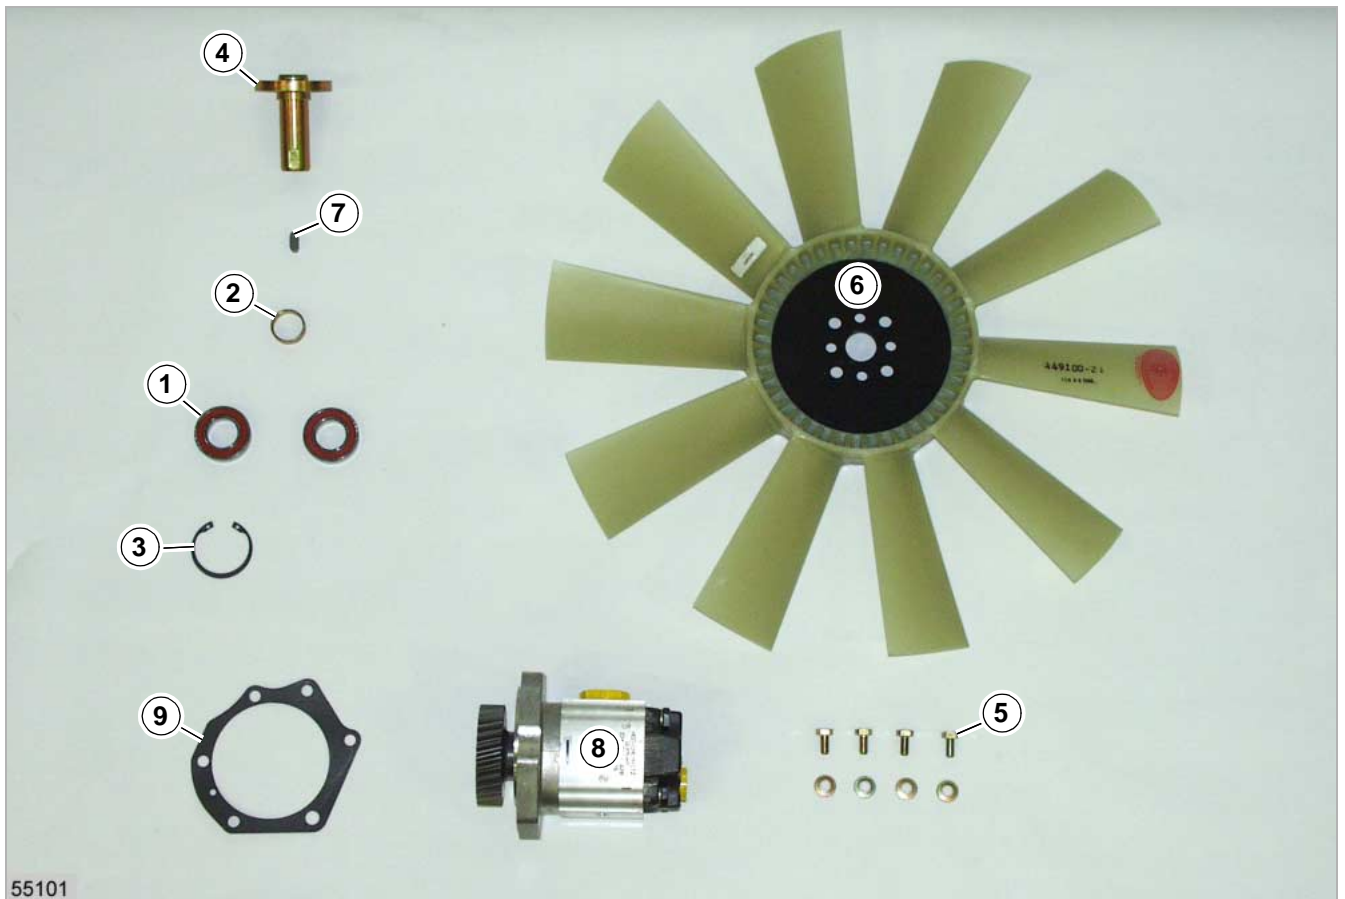

55101

1

4 Shipping Package

SHIPPING PACKAGE

Conversion kit 349 332.0

Pos. no.	Parts no.	Description	Dimension	DIN	Quantity
1	237 713.0	Deep groove ball bearing	2 RS	6005	2
2	317 410.0	Spacer ring			1
3	235 181.0	Circlip	47 x 1.75	472	1
4	349 330.1	Fan hub			1
5	237 439.0	Hexagon head bolt	M 8 x 16	933-8.8	4
	239 387.0	Contact washer	A 8		4
6	349 334.0	Fan	21 inch		1
7	317 277.0	Parallel key	8 x 7 x 18		1
8	349 333.0	Hydraulic pump	17 ccm		1
9	317 744.0	Seal			1

(fig. 1)


Screw the V-belt protection back on.

Install the radiator grille again.

Close the engine bonnet again.

Preparing and performing the test run

1. Correctly tighten all bolts!
2. Put back the used tools!
3. Mount all safety features and make sure that they are operative!
4. Check the electric connections!
5. Check the settings of the machine!
6. Grease all necessary lubricating points!
7. Check all oil levels!
8. Make a test run!

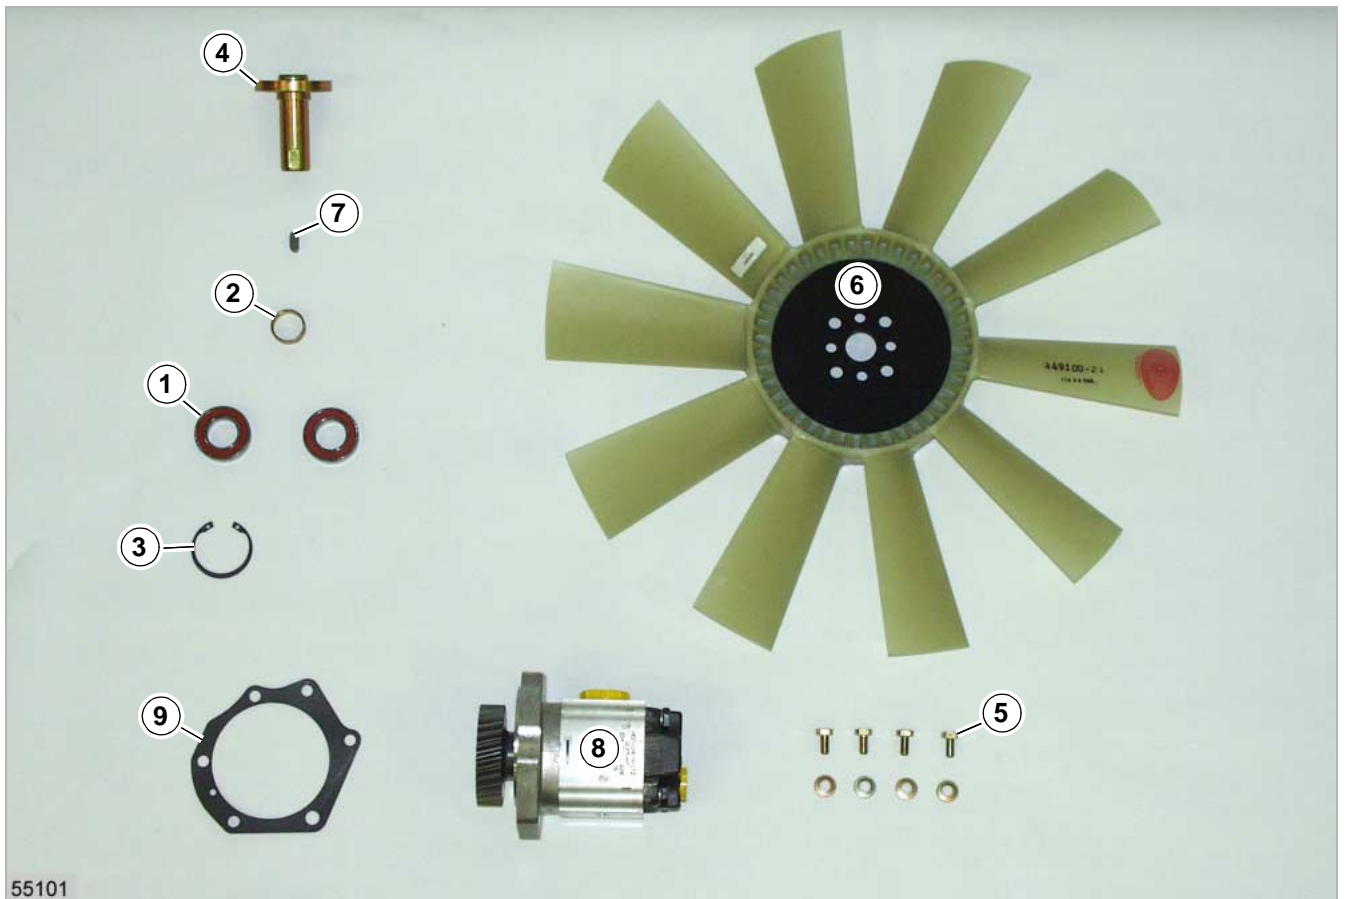

55101

1

4 Pièces fournies

PIÈCES FOURNIES

Jeu de modification 349 332.0

No. pos.	No. réf.	Désignation	Dimensions	DIN	Quantité
1	237 713.0	Roulement à gorge profonde	2 RS	6005	2
2	317 410.0	Bague d'entretoisement			1
3	235 181.0	Circlips	47 x 1,75	472	1
4	349 330.1	Moyeu de ventilateur			1
5	237 439.0	Vis à tête hexagonale	M 8 x 16	933-8.8	4
	239 387.0	Rondelle contact	A 8		4
6	349 334.0	Ventilateur	21 pouces		1
7	317 277.0	Clavette noyée	8 x 7 x 18		1
8	349 333.0	Pompe hydraulique	17 ccm		1
9	317 744.0	Joint			1

(fig. 1)

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL