


CLAAS

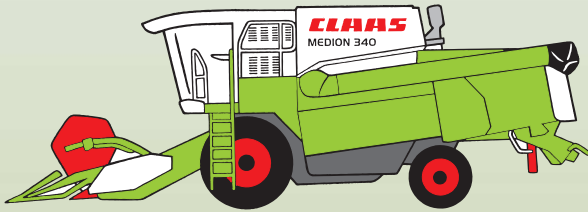

MEDION 340-310

**Anbauanleitung
Rundumleuchte**

**Fitting Instructions
Warning Beacon**

**Notice de montage
Gyrophare**

SERVICE & PARTS


CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

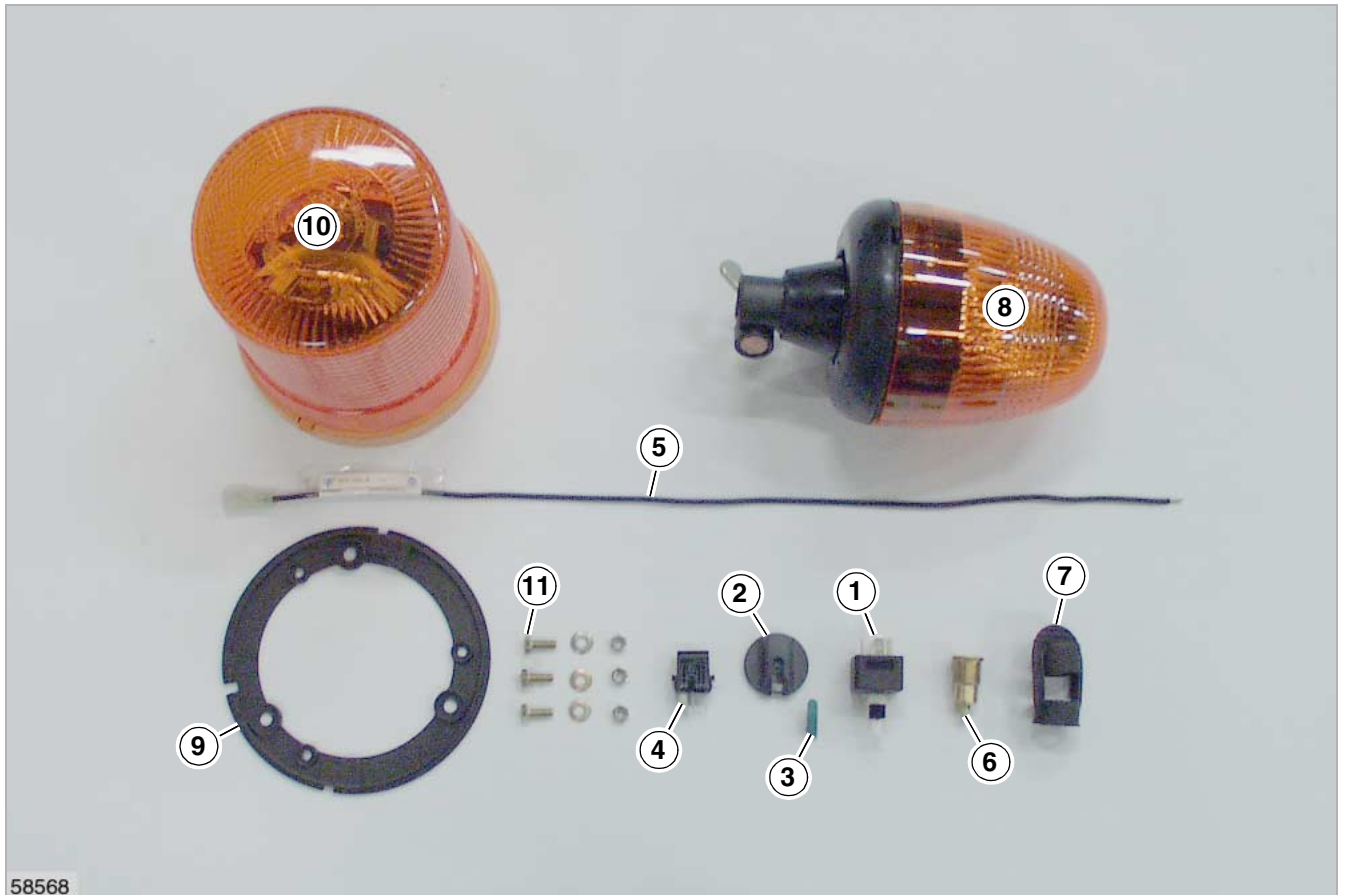

58568

1

4 Lieferumfang

LIEFERUMFANG

Nachrüstsatz 012 962.1

| Pos.-Nr. | Ersatzteil-Nr. | Bezeichnung | Abmessungen | DIN | Anzahl |
|----------|----------------|-------------------|-------------|---------|--------|
| 1 | 013 137.0 | Drehschalter | | | 1 |
| 2 | 625 921.0 | Drehknopf | D 40 | | 1 |
| 3 | 625 925.0 | Einleger | D 40 | | 1 |
| 4 | 013 055.0 | Schaltrelais | | | 1 |
| 5 | 013 109.0 | Verbindungskabel | | | 1 |
| 6 | 077 521.0 | Steckdose | | | 1 |
| 7 | 077 522.0 | Stopfen | | | 1 |
| 8 | 077 520.0 | Rundumleuchte | 12 V | | 1 |
| 9 | 682 460.0 | Gummidichtung | | | 1 |
| 10 | 682 216.0 | Rundumleuchte | 12 V | | 1 |
| 11 | 237 465.0 | Sechskantschraube | M 6 x 16 | 933-8.8 | 3 |
| | 236 169.0 | Sechskantmutter | M 6 | 934-8 | 3 |
| | 235 131.1 | Federring | 6 | | 3 |

(Abb. 1)

GB

Fitting Instructions

Warning beacon

5 Installation

INSTALLING THE WARNING BEACON

Preparing the installation



Danger!

Stop the engine and switch off the battery isolator switch.



58551


1

Installing the rotary switch (1)

Remove the cap (k) from the switch shield (B).

Remove the shield (B).

(fig. 1)

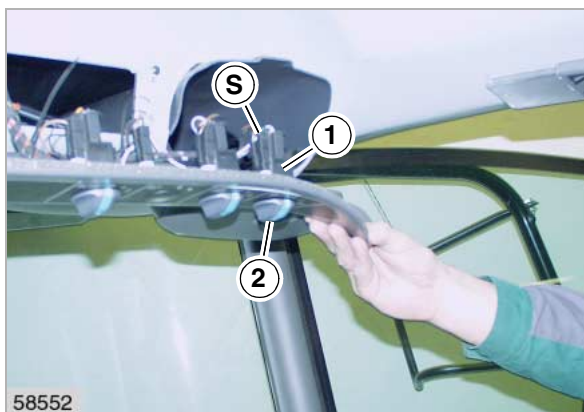

58552

2

Insert the rotary switch (1) into the shield (B) and fasten it with two nuts.

Put the turn button (2) with the insert (3) onto the rotary switch (1).

Connect the cable plug (S) onto the rotary switch (1).

(fig. 2)



58553

3

Screw the switch shield (B) back on. Watch the installation of the cables.

(fig. 3)

1 Introduction

INTRODUCTION

Cette notice décrit une procédure de travail sûre et économique, pour le montage ultérieur de gyrophares.


Les moissonneuses-batteuses LEXION 340-310 peuvent être équipées ultérieurement avec le jeu d'équipement supplémentaire réf 179 217.0, à partir des numéros de machine suivants: 93100011, 93200011 et 93400011

Le temps de montage alloué s'élève à environ 2 homme-heures.

Les pièces contenues sont mentionnées à la page 4.1.

Il est impératif de respecter les »Consignes de sécurité« figurant dans la présente notice d'utilisation.

Votre Service Après-Vente CLAAS

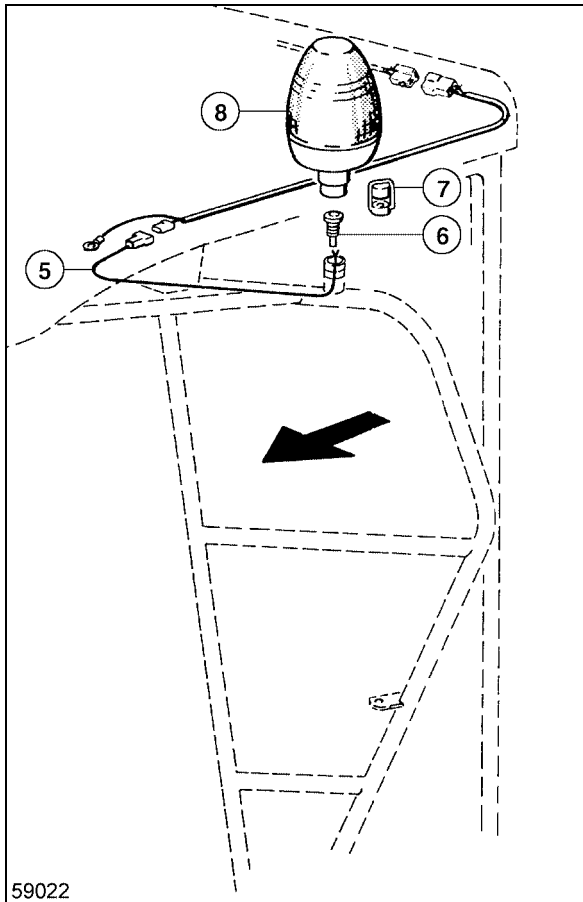

Montage du gyrophare (8) à l'avant

7



Ouvrir le toit de la cabine en tournant le levier vers la gauche.

(fig. 8)

8



Rabattre le toit de la cabine vers le haut jusqu'à ce que l'amortisseur à gaz gauche soit bloqué par le bloc d'arrêt (S).

(fig. 9)

9

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL