

CLAAS



VARIANT 350
VARIANT 370
VARIANT 360 - 365
VARIANT 380 - 385

Notice de montage

Kit garde-corps

Anbauanleitung

Montageset Geländer

Fitting Instructions

Guard rail kit

Istruzioni di montaggio

Kit protezione

Instrucciones de montaje

Kit de protección del cuerpo

Руководство по монтажу

Комплект перил

SERVICE & PARTS

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.


CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

3 Lot de pièces

3.1 VARIANT 3XX – 00 0857 722 0

109729

3.1.1 Garde-corps et visserie

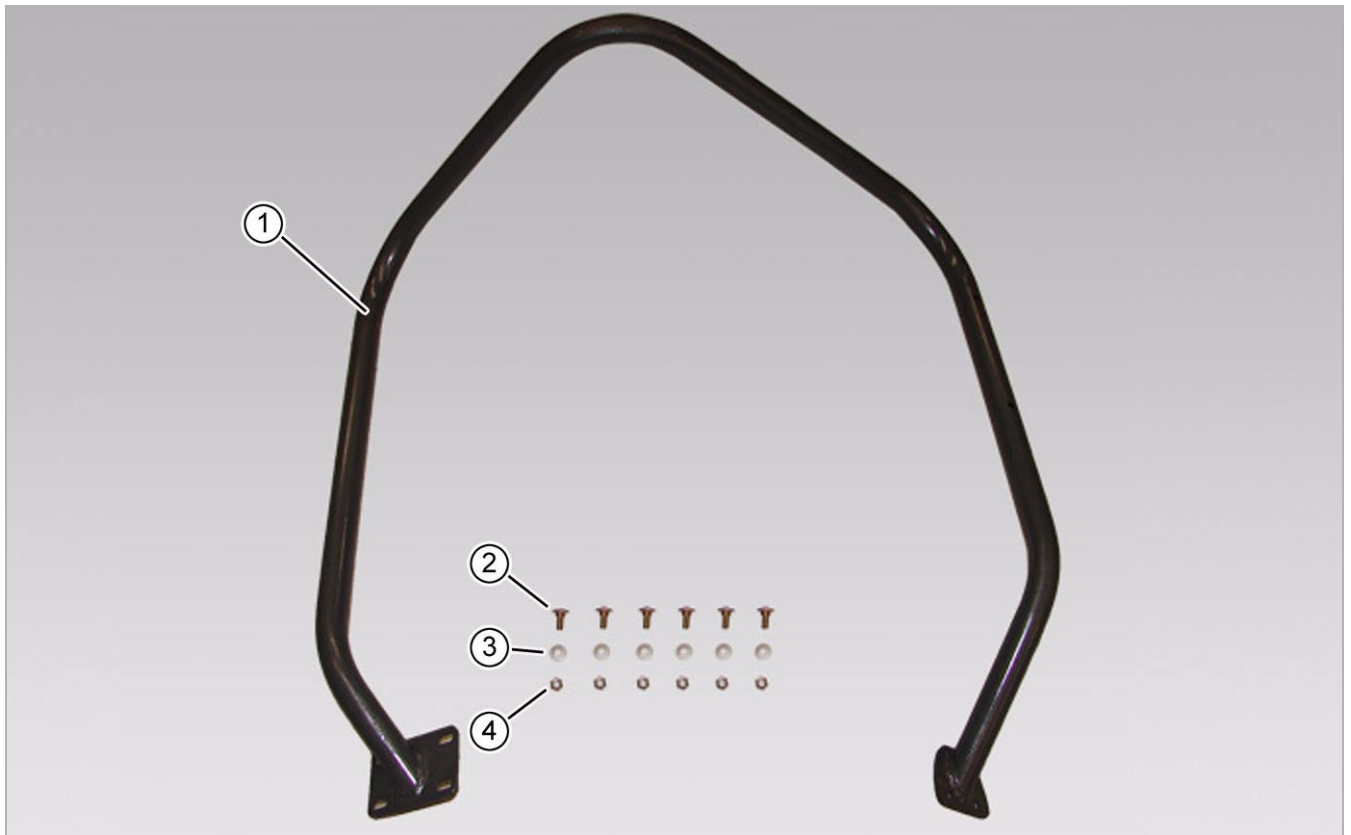

40383 **1**

Pos.-Nr.	Description	Dimensions	Référence	Quantité
1	Garde corps soudé		00 0857 727 0	1
2	Vis	M 8 x 25 - 8.8	00 0233 503 0	6
3	Rondelle contact	A8	00 0239 387 0	6
4	Ecrou de sécurisé	M8	00 0238 132 0	6

4 Montage des Geländers

4.1 Beschreibung

109753

4.1.1 Sichern der Presse

**Gefahr!**

Bei Arbeiten zur Instandsetzung, Wartung, Säuberung oder bei technischen Eingriffen an der Presse können Antriebselemente in Bewegung geraten.

Auswirkung: Lebensgefahr oder schwere Verletzungen durch bewegte Teile

- Die Zapfwelle abstellen.
- Einheit Traktor/Presse anhalten.
- Motor des Traktors abstellen.
- Zündschlüssel abziehen.

**Warnhinweis!**

Unerwartete Bewegung der Presse.

Auswirkung: Lebensgefahr, Gefahr eines schweren Unfalls oder einer Beschädigung der Presse

- Die Presse auf einem ebenen und stabilen Untergrund abstellen.
- Stets die Feststellbremse aktivieren, bevor die Presse vom Traktor abgekuppelt wird.
- Keile unter die Räder schieben.
- Stets den Stützfuß in die Sicherungstellung bringen, bevor die Presse vom Traktor abgekuppelt wird.


4.2 Preparing the baler

109748

4.2.1 Moving the hydraulic brake hose support (depending on equipment)

Follow the instructions below if the machine is equipped with a hydraulic brake or active hydraulics.

- Remove the hydraulic brake hose support (A).
- Drill a \varnothing 7 mm hole, keeping to the following inter-centre dimensions:
 - X1 = 50 mm,
 - Y1 = 60 mm.
- Repaint the drilled area to prevent corrosion.
- Insert the support in the new drilled hole.

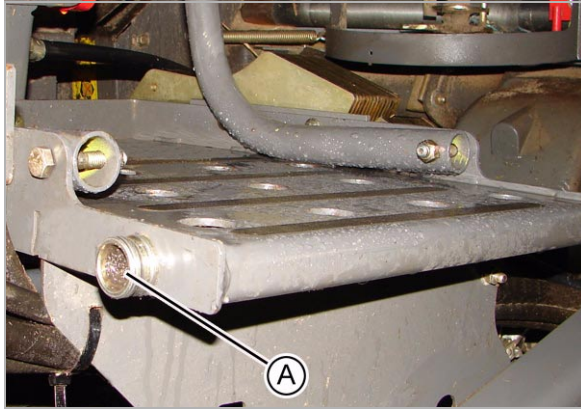

1

40390




2

40408

4.2.2 Esecuzione dei fori di fissaggio

- Effettuare 4 fori di $\varnothing 9$ mm rispettando le seguenti distanze dai centri:
 - X1 = 29 mm,
 - X2 = 80 mm,
 - Y1 = 11 mm.
 - Y2 = 49 mm.

Attenzione: utilizzare una squadra e un righello come nell'illustrazione a lato per misurare le distanze X1 e X2.

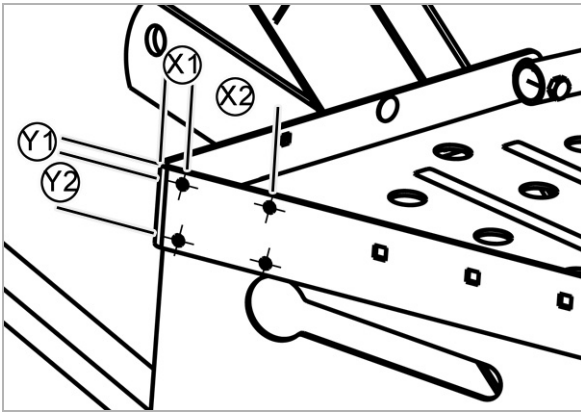


3

40407



4

40379

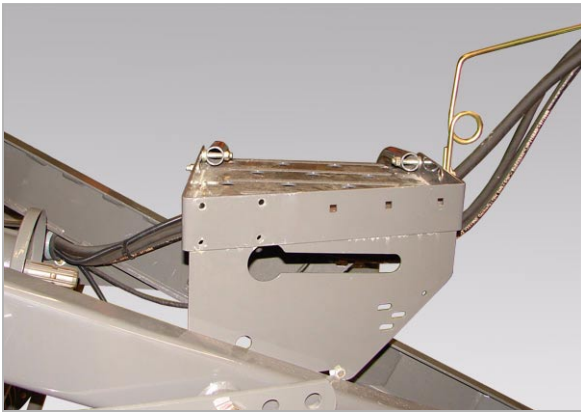


5

40380

- Riverniciare la zona forata per evitare la corrosione.


4.3 Colocación de la protección del cuerpo

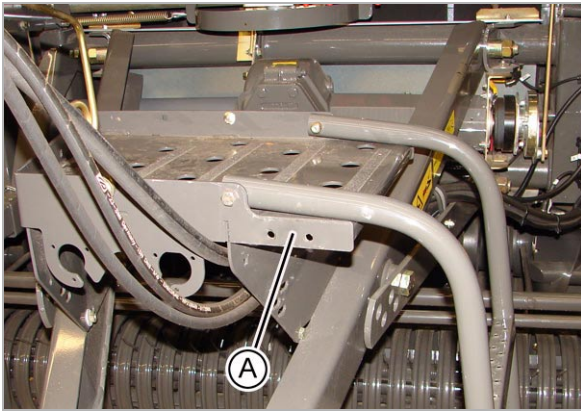

40381

6

- Colocar la protección del cuerpo (1) en la máquina e instalar los 2 tornillos (2), arandelas (3) y tuercas (4) sin apretarlas en la cara delantera (A) de la plataforma.

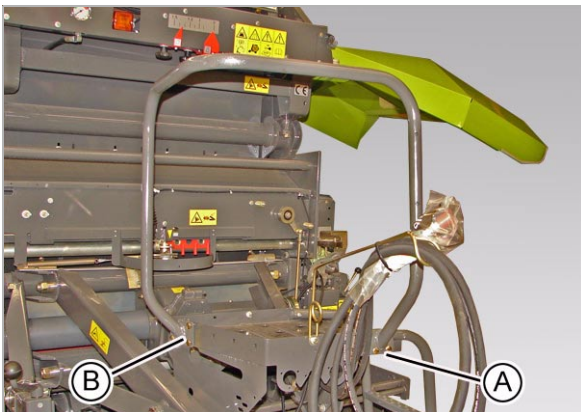

40382

7

- Colocar los 4 tornillos (2), arandelas (3) y tuercas (4) sin apretarlas en la cara derecha (B) de la plataforma.
- Ajustar los 6 tornillos.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL

- Thank you very much for reading the preview of the manual.
- You can download the complete manual from: www.heydownloads.com by clicking the link below



- Please note: If there is no response to CLICKING the link, please download this PDF first and then click on it.

CLICK HERE TO **DOWNLOAD** THE COMPLETE MANUAL